




G1107 Ranges

Oven Thermostat Replacement (Natural and Propane Gas)

The kit comprises the following parts:

Description	No. off
Screw M3 x 12mm	2
Screw No.6 x 1/4"	2
Screw No.6 x 3/8"	4
Bypass Screw 0.55mm (Propane)	1
Thermostat	1
Oven Phial Guard	1
Thermostat Phial Clip	2
Capillary Clip	4
Adaptor	1
Elbow	1
Coupling	1
Extension for Thermocouple	1
Pipe	1
Thermocouple	1

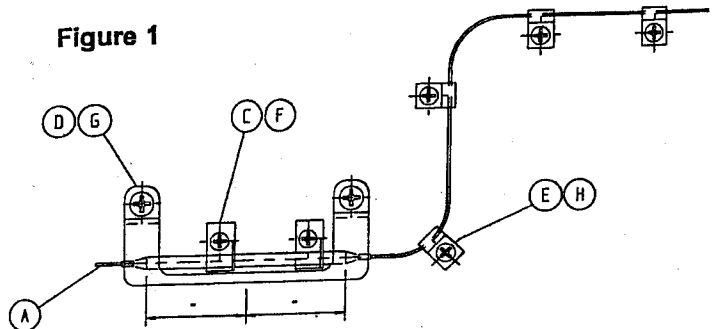

1. Remove RH outer side panel.
2. Remove oven shelves and RH shelf hanger bracket
3. Remove oven bottom plate and oven control shield.
4. Remove oven thermostat and flame failure device as detailed in installation and servicing instructions.
5. When phial has been removed from clips, remove and discard guard and clips.
6. Remove oven feed pipe and discard.
7. Fit replacement thermostat to float rail and feed phial through hole into oven chamber.
8. On oven chamber RH side, there are 2 x M3 threaded inserts and 2 holes. Secure 2 phial clips (C) using 2 x M3 x 12mm fixings (F). Secure phial guard (D) using 2 x No.8 x 1/2" fixings. If appliance does not include mounting holes then drill these as indicated in diagram on reverse of this sheet. (See Figure 2).
9. Slide thermostat phial into clips and position central to phial guard.
10. Secure phial capillary using the 4 clips (E) and No.6 x 1/4" fixings.
11. Fit oven feed pipe from thermostat to oven burner. Use fittings supplied to connect pipe to burner.
12. Fit thermocouple extension to thermocouple and connect to thermostat and burner.
13. Replace shelf hangers, shelves and outer side panel.
14. Check gas soundness and oven thermostat performance as detailed in Servicing Instructions.

Falcon Foodservice Equipment

HEAD OFFICE AND WORKS


Wallace View, Hillfoots Road, Stirling, FK9 5PY, Scotland.

AFE SERVICELINE CONTACT -

PHONE - 01438 363 000 FAX - 01438 369 900

T100629 Ref. 2

AGA FOODSERVICE GROUP

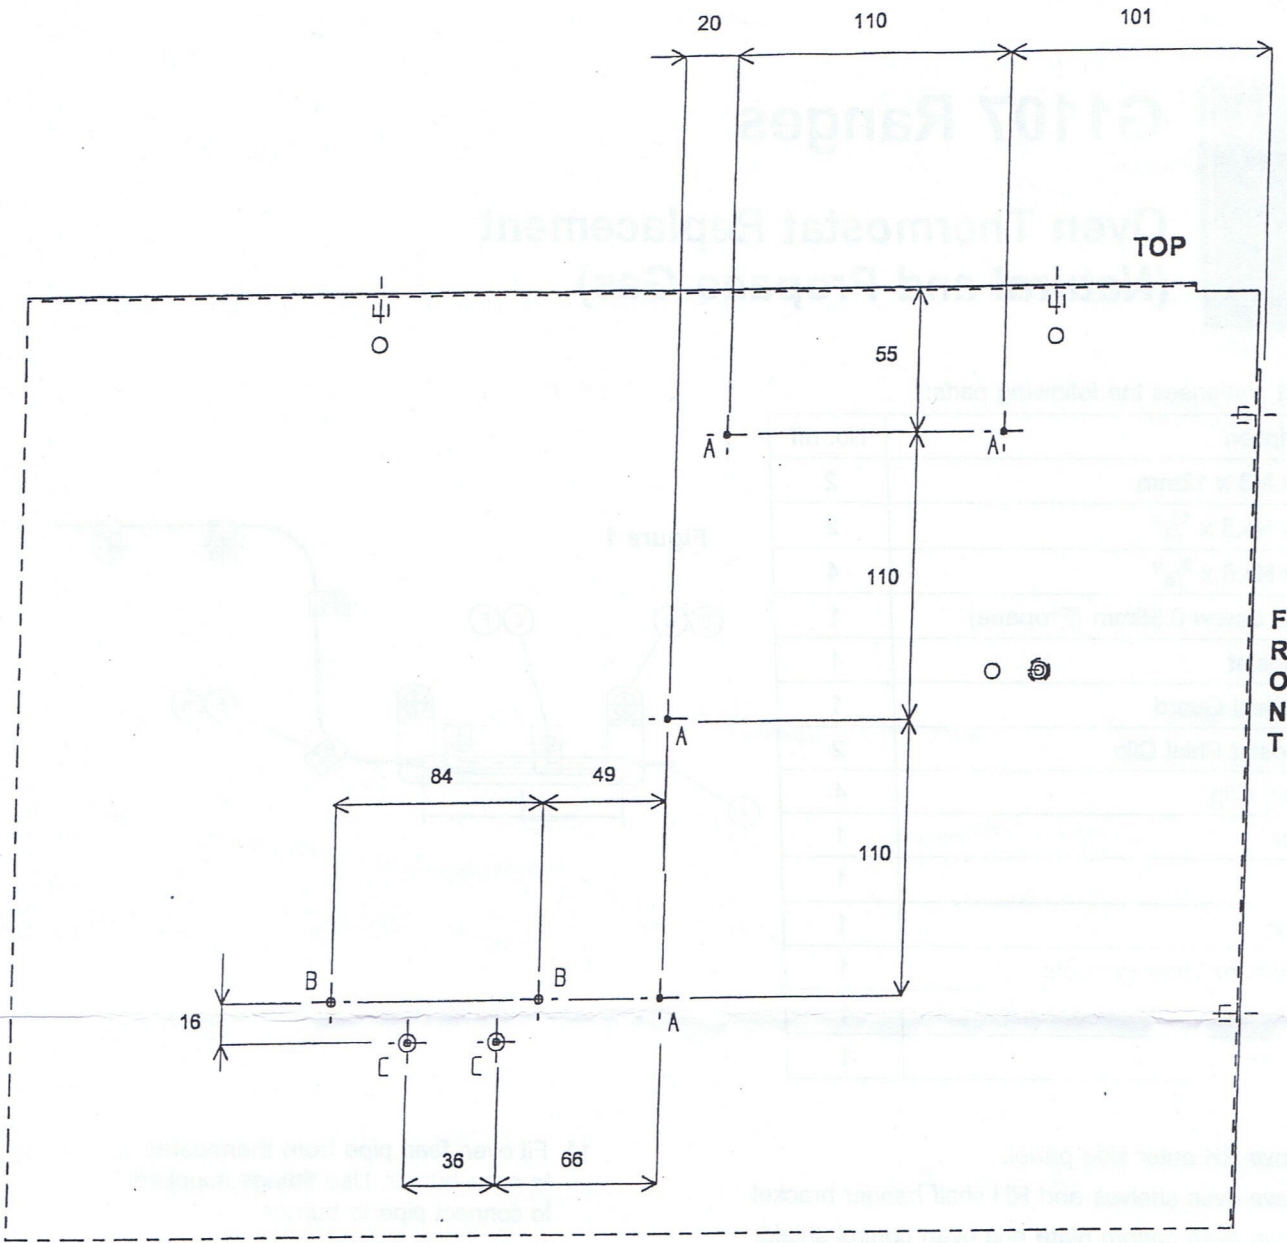

- A - 4 HOLES $\phi 2.8$
- B - 2 HOLES $\phi 3.6$
- C - 2 HOLES $\phi 4.8$ TO TAKE M3 NUTSERTS